


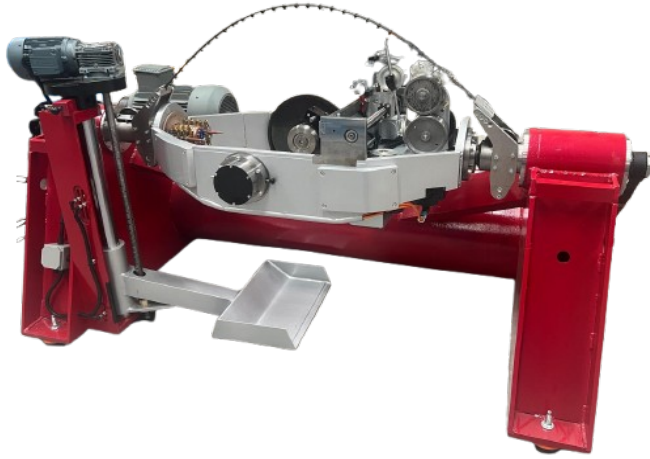

## DTB630-800

### Double Twists Bunching Machine

- Machine is suitable for using right and left-hand options
- Rotating components are optimized for aerodynamical movements
- Infinitely options for lay-length to working flexibility
- Adjustable winding force, controlled via a load cell in spooler carrier
- Reduced energy consumption and low noise emissions

| Technical Specifications    | DTB630             | DTB800             | Units           |
|-----------------------------|--------------------|--------------------|-----------------|
| Maximum Production Speed    | 300                | 300                | m/min           |
| Production range for copper | 0,09 .... 6,0      | 0,25 .... 16       | mm <sup>2</sup> |
| Lay length                  | 6 .... 100         | 15 .... 160        | mm              |
| Maximum number of twists    | 6500               | 5000               | twists/min      |
| Spool Dimensions            |                    |                    |                 |
| Flange Diameter             | 630                | 800                | mm              |
| Spool width                 | 475                | 600                | mm              |
| Drive for rotor bow         | Standard           | Standard           |                 |
| Drive for winding unit      | Servo motor        | Servo Motor        | -               |
| Machine Dimensions          | 3,10 x 1,75 x 1,63 | 3,85 x 2,15 x 2,15 | m               |
| Weight                      | Apprx. 3200        | Apprx. 6500        | kg              |



For more information..

Sultansazı OSB Mah. 4.Cadde No:12 Melikgazi/KAYSERİ

☎ +90 352 503 00 50

☎ +90 352 503 00 51

✉ [info@emvo.com.tr](mailto:info@emvo.com.tr)

🌐 [www.emvo.com.tr](http://www.emvo.com.tr)

**EMVO** Inspired by **EXPERTISE**